

The Pushing Mechanism Design of Jumping Robot

R. Zinko¹ • M. Lobur¹ • A. Zdobytskyi¹ • T. Stefanovych¹

Received: 28 October 2024 / Revised: 22 November 2024 / Accepted: 16 December 2024

Abstract. The paper presents the features of the design and possible application areas of the cam mechanism of a jumping robot. The design and technological parameters of the robot are substantiated according to its mass, the stiffness of the spring, the impact system, as well as the profile surface of the cam using the environment of Autodesk Inventor.

Directions for the development of jumping robot designs are highlighted, and the feasibility of developing cam mechanisms for robots is substantiated, considering the direction of its jump according to the distribution of forces and applied loads.

The calculation of the forces, power, and structural parameters of the impact system is presented, and all stages of the jumping process are thoroughly analyzed. These stages include the compression of the spring by a lever-type device, the removal of the compressing device, the release of the spring, and the final ballistic phase (flight phase).

Keywords: jumping robot, cam mechanism, design, solid model, cam profile.

Introduction

These days, mobile robots, which are complex mechatronic systems, have developed significantly. Initially, in the period from the 40s to the 70s years of the 20th century, their application areas were the military and space industries. Over time, more complex objects began to be created that can operate in conditions unacceptable for human life and existence, for example, in areas with radiation, where the radiation dose is several times higher than the permissible one.

One of the most promising areas of mobile robot development is jumping robots. The interest in robots that move off the surface is related to the fact that such objects have increased cross-country ability when moving over uneven or rough terrain, which significantly expands the possibilities of using mobile devices to monitor a certain area, monitor the environment after earthquakes and in other emergencies when robots can only move by jumping.

Review

The structures and mechanisms of movement of multi-link jumping robots are built by analogy with biological organisms that move by jumping, such as grasshoppers, frogs, and kangaroos. This method of movement is also realized by athletes in long jumps.

Among the methods of positioning before flight, the most common are turning the robot body on wheels or legs or changing the angle of the body to the surface by changing the position of its center of mass, as well as turning the acceleration module relative to the stationary body. After landing, jumping robots can be positioned to achieve a steady state from which the next jump can be realized by changing the geometry of the device's links or by changing the position of the center of mass. Another classification feature of jumping robots is the number of links included in them. There are two-, three-, and four-link robots. Various drives can be used to make robots off the surface, such as springs or with additional kinematic links, pneumatic, hydraulic, those that operate on a fuel-air mixture, and according to the type of movement performed by the links at the acceleration, pairs of rotational and translational motion are distinguished.

Jumping robots differ in weight, dimensions, jumping parameters and technologies, and methods of starting

✉ R. V. Zinko
Roman.V.Zinko@lpnu.ua

¹ Lviv Polytechnic National University, Lviv, Ukraine

from the surface and landing on it. However, the task of designing a robot that performs a controlled jump with the required height and length remains actual, since in almost all created robots these parameters of jump are strictly related to the characteristics of the drives that are used to take objects off the surface.

In a significant number of robots, the jump is provided by a spring drive containing a spring compression mechanism [1]–[3]. The jump occurs when the potential energy accumulated in the spring is converted into the kinetic energy of the body.

The translational pair is formed by a mechanical transmission driven by a motor. This transmission compresses a spring located in the robot's leg. The energy accumulated in the spring is released when the motor is turned off, causing the robot to take off the surface. One of the possible variants of the drive is presented in [4]. It uses a cable wound around a drum to compress the spring. The drum is mounted in a body and driven by a motor through a bevel gear.

A remotely controlled jumping robot [5] is composed of a vibration unit and two compressed springs (Fig. 1). The vibration unit consists of two DC motors, two eccentric weights with a battery, and an electronic control system. Its main components are made of polycarbonate to ensure heat resistance.

The jumping mechanism of the TAUB robot provides a stable compression of the spring [6]. In MSU robots

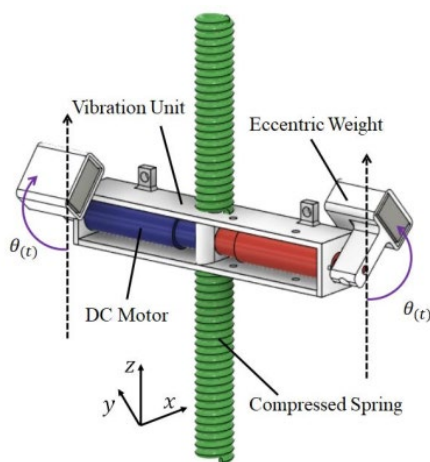


Fig. 1. Continuous jumping mechanism [5]

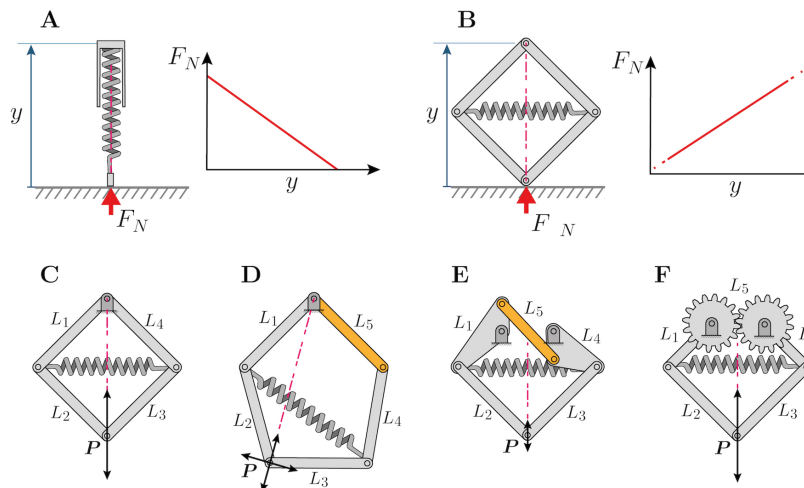


Fig. 2. The telescopic prismatic mechanism (A) and hinge rhomb linkage (B), with their characteristic ground reaction force with longitudinal displacement graph. From (C–F), synthesis of a synchronous hinge rhomb linkage using a pair of synchronizing gears. Dotted line extremes in graph B highlight singular or nonlinear behavior of FN depending on y for specific geometry configurations [10]

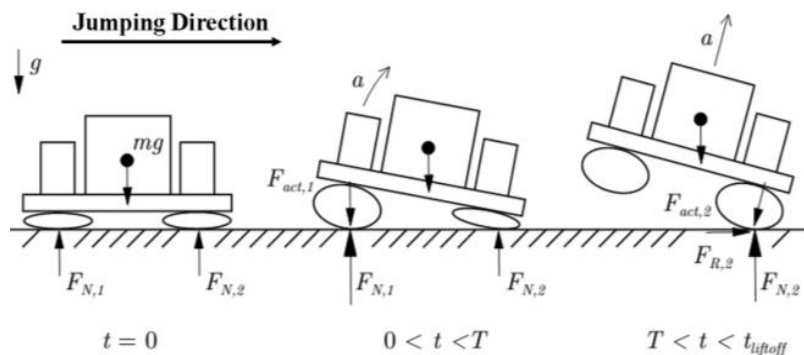


Fig. 3. Directional jumping concept [11]

[7]–[10], the jump is provided by additional kinematic links. Different variants of kinematic linkage make it possible to provide different characteristics of the jumping process and various drive layouts (Fig. 2). In some designs, they are used to stabilize the robot during the flight stage.

To enable jumping, pneumatic systems are used [11]–[19], but they are not sufficiently efficient due to the need for additional sealing and ensuring the direction of the jump (Fig. 3). Moreover, a special drive or compressor design is required to provide the impulse or impact action for the jump.

In jumping robots, hydraulic actuators are used to enable the relative movement of links or compression of springs [20]–[22].

For reducing the weight of a jumping robot, the use of combustible fuels has been proposed, specifically propane (C_3H_8) as a flammable gas and nitrous oxide (N_2O) as

an oxidizer [23]–[25]. Both gases are non-toxic, neutral, and stable, which makes them environmentally friendly.

The design of the hopping actuator is shown in Fig. 4. This actuator comprises a cylinder, an internal hollow piston, a magnet set, an ignition system, and some other components [25].

The hollow piston facilitates a compact design [25]. The fuel mixture enters the combustion chamber through the gas fuel inlets. The exhaust gas and air exit through the exhaust holes. The ignition process is initiated by a glow plug with a platinum filament, acting as a catalyst to accelerate the chemical reaction. The combustion process follows similar processes for internal combustion engines. A removable cylinder lid makes the actuator easy to assemble and maintain.

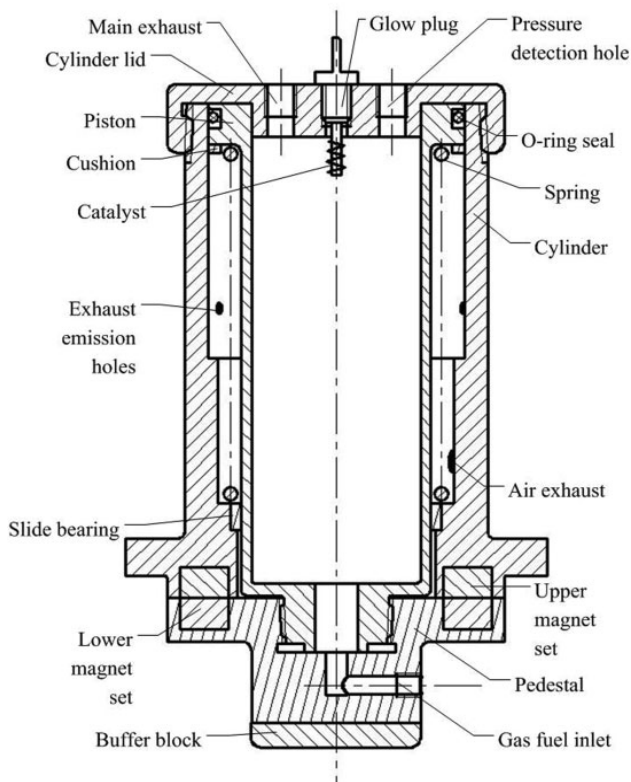


Fig. 4. Design of the hopping actuator [25]

An actuator featuring two combustion chambers can be employed (Fig. 5). This design provides increased power, but it is also more complex.

An alternative to the impulsive (impact) movement of the leg is using a cam mechanism [26]. A properly selected cam allows for the effective execution of the jumping process (Fig. 6).

The jumping process consists of four phases: compression of the spring by the compression device (latched phase), removal of the compression device (phase of unlatching), the release of the spring (phase of unconstrained spring-actuation), and the flight stage (ballistic phase) (Fig. 7).

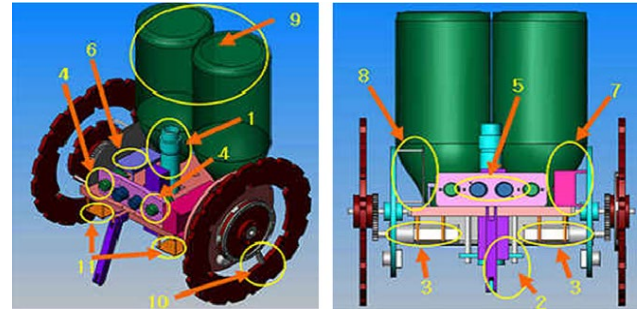


Fig. 5. Structure and components of the Scout Robot: 1. cylinder, 2. solenoid valve, 3. motor encoder, 4. camera, 5. ultrasonic sensor, 6. Bluetooth module, 7. digital signal processor controller, 8. electric power circuit, 9. air tank, 10. damper, 11. motor driver [25]

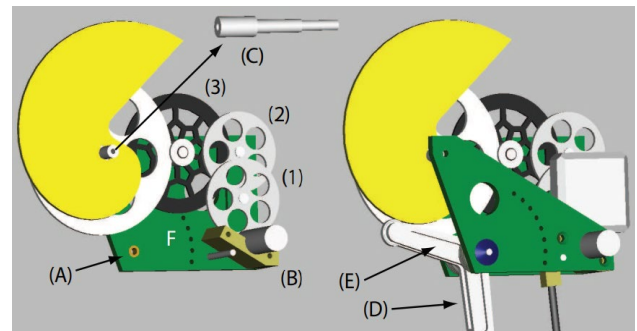


Fig. 6. CAD model of the gearbox. (A) brass bearing to reduce friction, (B) distance piece to align the two body plates, (C) cam axis, (D) slot in the main leg for the cam, (E) main leg, (F) series of holes for spring setting. (1), (2) 0.2 mm POM gears, and (3) 0.3 mm POM gears [26]

One of the variants of the compression device can be a cam-operated actuator. Its advantage is the combination of the compression and release devices in one part (cam), which allows for simplifying the design. A limitation may be the amount of spring deformation. It will affect the geometric dimensions of the cam, and, accordingly, the layout of the compression device. It is also necessary to consider the impact loads on the cam at the moment of spring release.

Main Part

A design of the jumping robot drive has been developed, shown in Fig. 8.

The jumping robot has three support legs. The jumping leg mechanism consists of a cam rotation drive (1), which compresses the compression spring (3) by rotating the cam (2). The compression spring is fixed in the cylinder (4). At the time of cam clicking (a jump transition at the cam profile), the energy stored in the spring propels the lever (6), connected to the slider (5) by a spring. The other

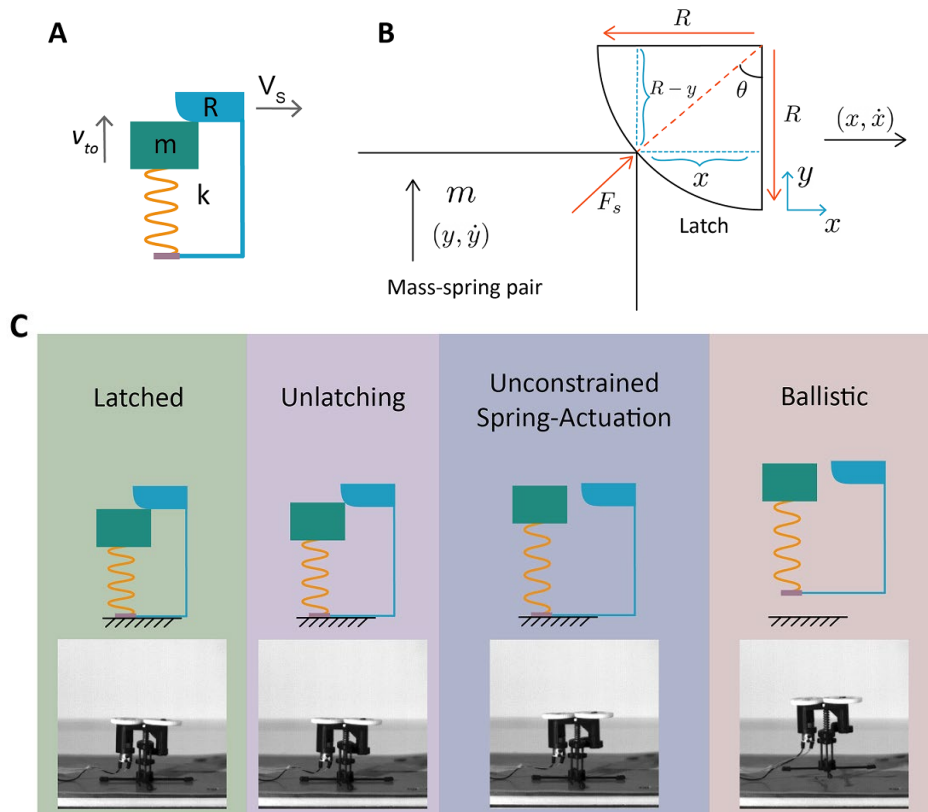


Fig. 7. (A) Reduced-order LaMSA model with the latch characterized by latch radius R and latch-motor actuation voltage V_s . (B) Close-up view of the interface between the latch and mass-spring pair. Here, the constraint of constant latch velocity is relaxed, by allowing the latch retraction to be influenced by the feedback from the mass-spring pair. (C) Different LaMSA phases [27]

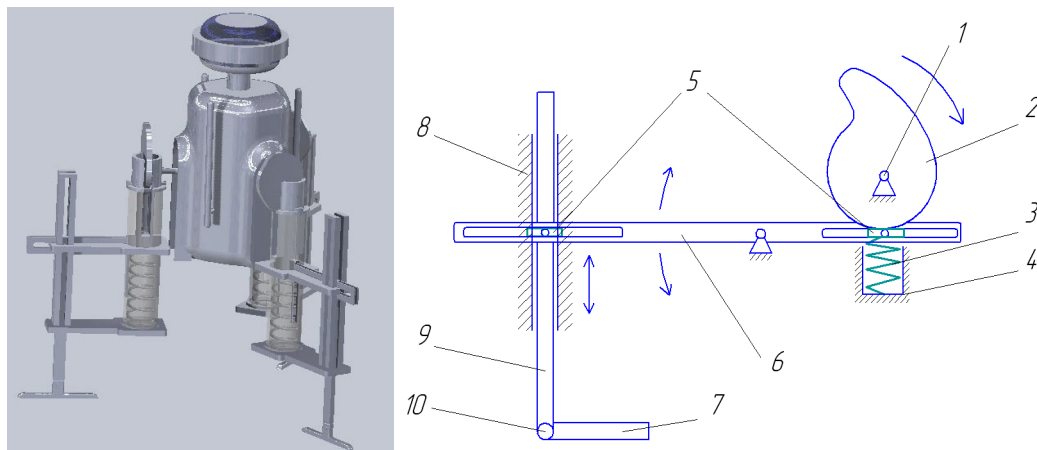


Fig. 8. Structure of the jumping robot: 1. cam rotation drive, 2. cam, 3. compression spring, 4. cylinder, 5. slider, 6. lever, 7. foot, 8. guides, 9. leg

end of the lever is connected to a leg (9), which is attached to it by a slider and moves along guides (8).

After the clicking, the energy from the spring is transferred through the lever to the leg, which, moving along the guides, gives the robot body an impulse to jump. After that, the jump takes place.

The robot's leg is positioned using two actuators: a leg rotation actuator relative to the foot (7) and a body rotation actuator relative to the leg (not shown in fig. 8).

The calculation of energy and structural parameters of the impact system was conducted considering the methodology [28].

Designing and manufacturing cam mechanisms is a complex and time-consuming process. The quality of the mechanism's operation depends on the accuracy of machining the cam's profile surface. An automated cam mechanism design system speeds up production time, increases productivity and quality, allows for the creation of solid models of both individual parts and entire assemblies, facilitates assembly calculations, analyzes motion characteristics, examines the kinematic and dynamic characteristics of the cam mechanism, selects optimal mechanism parameters, and prevents errors at an early stage of design.

According to the proposed structure, the cam is the driving link, and the slider (pusher) is the actuating element (output link). The movement of the slider depending on the cam rotation angle is described by the following relationship:

$$x_2 = \phi_x(\phi), \tag{1}$$

where x_2 is the rectilinear motion of the slider when the cam is rotated by an angle ϕ .

During the retraction phase, the slider moves linearly along the guides under the action of the cam, and during the approach phase, it accelerates to a pre-impact speed due to the potential energy of the compressed spring. During the nearside dwell interval, the slider makes a strike (jump) followed by a dwell. A diagram of the cam phase angles is shown in Fig. 9.

The working cycle of the slider movement can be divided into several intervals:

1) idle stroke $l_{is} = x_2$ corresponds to the retraction angle of the cam (slider moves to the extreme position (slider retraction) in time t_{zv} ;

2) The dwell period of the slider in the retracted state corresponds to the offside dwell angle of the cam t_{ds} ;

3) working stroke l_{ws} corresponds to the interval when the slider accelerates to the pre-impact speed (slider acceleration) t_p ;

4) impact (jump) of the slider and transferring the impact force through the lever to the jumper's leg t_y ;

5) dwell period of the slider after impact under the static load, that corresponds to the nearside dwell angle of the cam (impact - dwell) t_{bs} .

This way, the slider's working cycle can be written as:

$$T_C = t_{zv} + t_{ds} + t_p + t_y + t_{bs}, \tag{2}$$

The full cycle of the slider's movement (retraction, dwell, acceleration, impact, dwell) takes place in time:

$$T_C = 1/f, \tag{3}$$

where f is the frequency of impacts (jumps):

$$f = n \cdot z, \tag{4}$$

where n is the rotational speed of the cam, and z the number of cams.

The working process of the cam mechanism is represented by a diagram of the slider movements depending on the cam angle (fig. 9).

The main design parameters that determine the dimensions of the jumping mechanism are the geometric characteristics of its elements and the working stroke of the slider $l_p(x)$. The working stroke is determined based on the impact energy and pre-impact speed and is defined by the parameters of the cam.

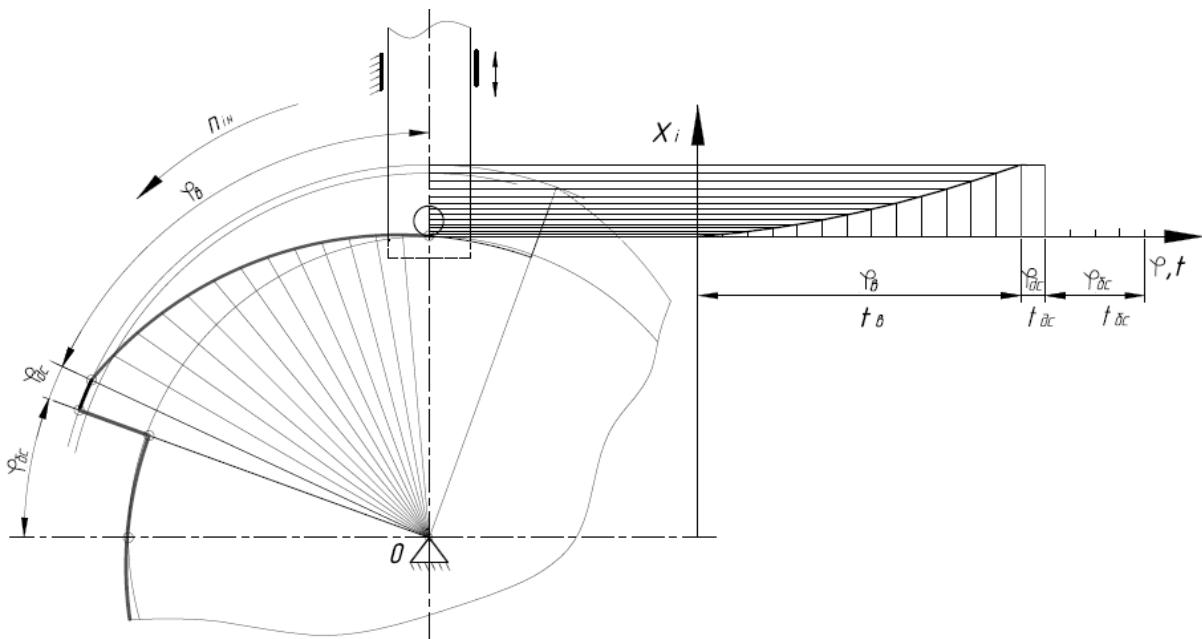


Fig. 9. The displacement diagram of the slider movement with the phase angles of the cam: 1 – cam; 2 – slider (pusher); ϕ_v – retraction angle; ϕ_{ds} – offside dwell angle; ϕ_{bs} – nearside dwell angle

Autodesk Inventor is a design environment that includes a system of specialized CAD documents (Documents), transient geometry (Transient Geometry), command manager (Command Manager), and user interface manager (User Interface Manager) [29]. Autodesk Inventor supports the following main types of documents: Assembly Documents, Part Documents, Presentation Documents, and Drawing Documents. Each type of document allows for the creation and manipulation of sets of component objects (Selection Set) and individual components (Component Definition). For each component, all the objects characterizing it and its properties are available.

For example, the description of a component (Component Definition) of a part (Part Document) includes sketches (2D and 3D contours), three-dimensional elements (extrusions, revolutions, sweeps, lofts, etc.) with reference sketches, construction elements (chamfers, joints, threads, etc.), functional elements (reference planes, axes, points), parameter tables controlling geometry. The description of a component (Component Definition) in an assembly document (Assembly Document) as an instance of a component (Component Occurrences) may include part document files (Part Document).

Elements of Transient Geometry are objects (points, vectors, matrices) that do not have graphical representation in models but are used in creating geometry in Autodesk Inventor documents.

Using objects of type Constraints in Assembly Documents establishes mutual constraints on the positioning and movement between parts, allowing for the creation of computer assemblies.

To construct a three-dimensional solid model, the coordinates of the practical cam profile are recorded in a file, which is then read and transmitted to Autodesk Inventor. Control of the modules is carried out using the Visual Basic.NET programming language. The problems regarding the transfer of information between different computer systems are solved based on this language.

The construction of the part begins with creating a two-dimensional sketch by calling functions written in VBA within the environment of Inventor. The purpose of these functions is to construct the cam profile as a sketch in Autodesk Inventor. It is highly convenient for further extrusion and other operations. The functions have initial input data such as the width, height, and hole radius. In Fig. 10, the solid model of the cam implemented programmatically in Autodesk Inventor is shown.

Similarly, subprograms were developed to create a sketch and a solid model of the pusher and other parts of the cam mechanism. At any stage of detail creation, it is possible to unfold it in real-time in a tinted mode and adjust the scale of the projected detail for better positioning. At the same time, the execution of the current editing command is not interrupted. Subsequently, with specially written functions, the computer assembly of the entire cam mechanism was programmatically carried out. Fig. 11 illustrates the programmatically obtained assembly of the cam mechanism in the Autodesk Inventor system.

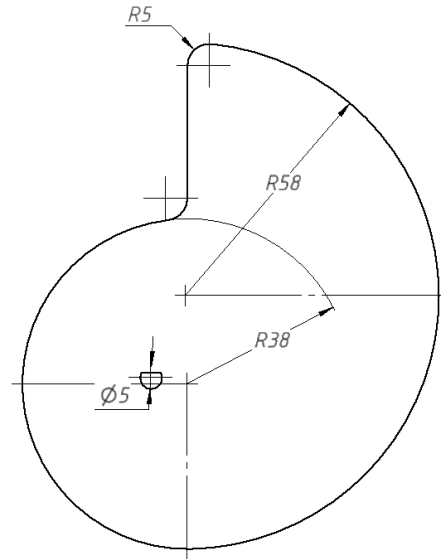


Fig. 10. 3D model of the drive cam (frontal view)

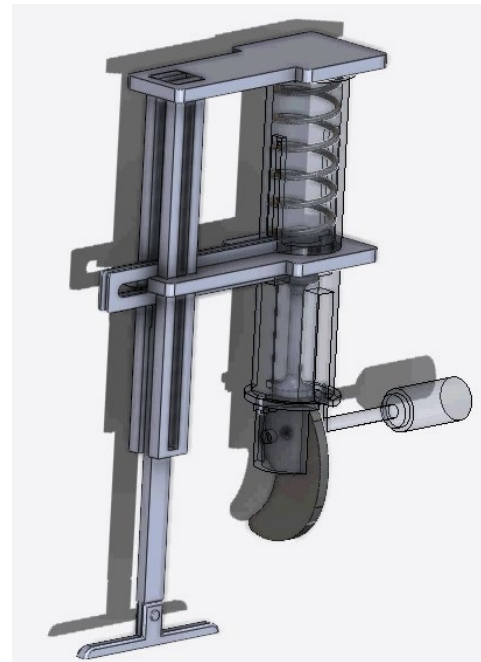


Fig. 11. Assembly of the cam mechanism in the Autodesk Inventor

With Autodesk Inventor, the model is treated as a real mechanism: when moving certain parts, their interaction with the environment is controlled. If any part is fully fixed or deprived of all degrees of freedom, then upon contact with it, the mechanism will stop, reflecting real problems in the operation of the finished product.

Such a system of automated cam mechanism design speeds up design processes and conducts various types of calculations, simulation modeling, and three-dimensional motion animation. The system links drawing views with initial models, so any changes made to the models are automatically reflected in the drawings for subsequent manu-

facturing on CNC machines or 3D printers. Continuous graphical representation of results and real interactivity further enhance efficiency. The built-in multi-page printing manager in Autodesk Inventor automatically arranges the set of drawing sheets to fit the appropriate paper size and optimizes the print file. Printing output is done directly on a plotter or through a print file.

To obtain more illustrative results and to verify the accuracy of the analytical dependencies for calculating the



Fig. 12. Experimental prototype of the cam mechanism

parameters of the jumping robot, it is designed the cam mechanism in the solid modeling environment of Autodesk Inventor. Additionally, the cam mechanism is reproduced by using 3D printing to verify the adequacy of the assumptions made (Fig. 12).

Conclusions

One of the most promising areas of mobile robot development is jumping robots. Jumping, as a method of movement, offers many advantages, as it represents an intermediate step between moving directly on a supporting surface and flying.

Various mechanisms can be used to propel robots off the surface, for example, with springs or with additional kinematic links, pneumatic or hydraulic systems, and those powered by a fuel-air mixture.

A jumping device using a cam mechanism combines compression and release elements into one component (cam).

Using the Autodesk Inventor software environment, the cam mechanism has been designed, significantly enhancing the efficiency of the design process and enabling the investigation of various operating modes of the device according to the established requirements.

Creating the prototype of the cam mechanism using 3D printing allows for a more thorough exploration of the jumping mechanism by the parameters of the cam profile, ensuring the necessary height of the robot's jump.

Autodesk Inventor enables speeding up the design process, performing various types of calculations, simulation modeling, and creating three-dimensional animations of the movement of cam mechanisms and the jumping drives as a whole.

References

- [1] U. Scarfogliero, C. Stefanini and P. Dario, "A bioinspired concept for high efficiency locomotion in micro robots: The jumping robot grillo," in *Robotics and Automation*, ICRA 2006, Proc. 2006 IEEE International Conference On, 2006, pp. 4037–4042, 2006, doi: [10.1109/ROBOT.2006.1642322](https://doi.org/10.1109/ROBOT.2006.1642322).
- [2] M. Kovac, M. Fuchs, A. Guignard, J. Zufferey and D. Floreano, "Miniature 7g jumping robot," in *Robotics and Automation*, ICRA 2008, IEEE International Conference On, 2008, pp. 373–378, 2008, doi: [10.1109/ROBOT.2008.4543236](https://doi.org/10.1109/ROBOT.2008.4543236).
- [3] N. Muliak, A. Zdobyskyi, M. Lobur and R. Kaczynski, "Optimization of Electromechanical Systems by Intelligent Design Methods," in Proc. *IEEE XVIII International Conference on the Perspective Technologies and Methods in MEMS Design (MEMSTECH)*, Polyana (Zakarpattya), Ukraine, pp. 65–69, 2022, doi: [10.1109/MEMSTECH55132.2022.10002914](https://doi.org/10.1109/MEMSTECH55132.2022.10002914).
- [4] J. Zhao, J. Xu, B. Gao, N. Xi, F. J. Cintrón, M. W. Mutka and L. Xiao, "MSU Jumper: a single-motor-actuated miniature steerable jumping robot," *Robotics*, IEEE Transactions On, vol. 29, pp. 602–614, 2013, doi: [10.1109/TRO.2013.2249371](https://doi.org/10.1109/TRO.2013.2249371).
- [5] A. Sayyad, B. Seth and P. Seshu, "Single-legged hopping robotics research," *Robotica*, Vol. 25, No. 5, pp. 587–613, 2007, doi: [10.1017/S0263574707003487](https://doi.org/10.1017/S0263574707003487).
- [6] Yuto Sango and Hiroyuki Ishii, "Prototype of Ball-like Jumping Robot for Playful Learning," *IEEE/ASME International Conference on Advanced Intelligent Mechatronics (AIM)* June 28–30, 2023, Seattle, Washington, USA, pp. 1220–1225, 2023, doi: [10.1109/AIM46323.2023.10196144](https://doi.org/10.1109/AIM46323.2023.10196144).

- [7] V. Zaitsev et al., *A locust-inspired miniature jumping robot Bioinspir*, Biomim, 10 066012, 2015, doi: [10.1088/1748-3190/10/6/066012](https://doi.org/10.1088/1748-3190/10/6/066012).
- [8] Z. Chen et al., *Design and experiment of single leg of hydraulically actuated bionic multi-legged robot*, Trans. Chin. Soc. Agric. Eng., 32, pp. 36–42, 2016.
- [9] J. Zhao, T. Zhao, N. Xi, M. W. Mutka and L. Xiao, *MSU Tailbot: controlling aerial maneuver of a miniature-tailed jumping robot*, IEEE/ASME Trans. Mechatronics, 20 2903-14, 2015, doi: [10.1109/TMECH.2015.2411513](https://doi.org/10.1109/TMECH.2015.2411513).
- [10] J. S. Koh et al., “Jumping on water: surface tension-dominated jumping of water striders and robotic insects,” *Science*, 349, pp. 517–521, 2015, doi: [10.1126/science.aab1637](https://doi.org/10.1126/science.aab1637).
- [11] A. Macario-Rojas, B. Parslew, A. Weightman and K. L. Smith, “Clover Robot: A Minimally Actuated Jumping Robotic Platform,” *Machines*, 10, 640, 2022, doi: [10.3390/machines10080640](https://doi.org/10.3390/machines10080640).
- [12] Feng Ni, Daniel Rojas, Kai Tang, Lilong Cai and Tamim Asfour, “A Jumping Robot Using Soft Pneumatic Actuator,” in *Proc. 2015 IEEE International Conference on Robotics and Automation (ICRA)* Washington State Convention Center Seattle, Washington, 26–30 May, pp. 3154–3159, 2015.
- [13] D. H. Kim, J. H. Lee, I. Kim, S. H. Noh and S. K. Oho, “Mechanism, control, and visual management of a jumping robot,” *Mechatronics*, vol. 18, pp. 591–600, 2008, doi: [10.1016/j.mechatronics.2008.05.004](https://doi.org/10.1016/j.mechatronics.2008.05.004).
- [14] K. Graichen et al., “Control design for a bionic kangaroo,” *Control Eng. Practice*, Vol. 42, pp. 106–117, Sep. 2015, doi: [10.1016/j.conengprac.2015.05.005](https://doi.org/10.1016/j.conengprac.2015.05.005).
- [15] H. Yan, H. Li and S. Zhou, “Study on hopping height control and detection for the pneumatic actuator,” in *Proc. of the 5th International Conference on Electrical Engineering and Automatic Control*, Harbin Inst Technol, Weihai, China, 16–18 October 2015, pp. 1121–1128.
- [16] R. Niiyama, A. Nagakubo and Y. Kuniyoshi, “Mowgli: A bipedal jumping and landing robot with an artificial musculoskeletal system,” in *Proc. of the IEEE International Conference on Robotics and Automation*, Rome, Italy, 10–14 April 2007, pp. 2546–2551.
- [17] Z. Zhang, J. Zhao, H. Chen and D. Chen, “A Survey of Bioinspired Jumping Robot: Takeoff, Air Posture Adjustment, and Landing Buffer,” *Appl. Bionics Biomech.*, 2017, doi: [10.1155/2017/4780160](https://doi.org/10.1155/2017/4780160)
- [18] B. Long et al., “Landing impact analysis of a bioinspired intermittent hopping robot with consideration of friction,” *Math. Probl. Eng.*, 2015, doi: [10.1155/2015/374290](https://doi.org/10.1155/2015/374290).
- [19] B. Long, G. Wenjie, C. Xiaohong and X.-y. Meng, “Hopping capabilities of a bio-inspired and minimally actuated hopping robot,” in *Proceedings of the 2011 International Conference on Electronics, Communications and Control (ICECC)*, Ningbo, China, 9–11 Sep. 2011, pp. 1485–1489.
- [20] T. Li, “Mechanism Design and Kinematic Analysis of a Frog-Inspired Jumping Robot,” Master’s Thesis, North China University of Technology, Beijing, China, 2009.
- [21] Q. Zhang, “The Structure Optimization and Kinematic Synthesis of a Biomimetic Frog Jumping Robot,” Master’s Thesis, North China University of Technology, Beijing, China, 2016.
- [22] C. Lu, “Design of a Biomimetic frog Robot and Research on Trajectory Planning of Intermittent Jumping,” Master’s Thesis, Harbin Engineering University, Harbin, China, 2016.
- [23] S. Hyon, T. Emura and T. Mita, “Dynamics-based control of a one-legged hopping robot,” in *Proc. InstnMech. Engrs.*, Vol. 217, pp. 83–98, 2003.
- [24] G. Wiedebach et al., “Walking on partial footholds including line contacts with the humanoid robot atlas,” in *Proc. of the 2016 IEEE-RAS 16th International Conference on Humanoid Robots (Humanoids)*, Cancun, Mexico, 15–17 Nov., 2016, pp. 1312–1319.
- [25] Y. Li, “Trajectory Planning and Stability Analysis of Bio-Frog Jumping Robot,” Master’s Thesis, Zhejiang University of Technology, Hangzhou, China, 2018.
- [26] R. Colin, 11.06.2000, Johnson Hopping robots mark a leap for engineering. Available: <https://www.eetimes.com/hopping-robots-mark-a-leap-for-engineering/>.
- [27] D. H. Kim et al., “Mechanism, control, and visual management of a jumping robot,” *Mechatronics*, Vol. 18, Issue 10, Dec. 2008, doi: [10.1016/j.mechatronics.2008.05.004](https://doi.org/10.1016/j.mechatronics.2008.05.004).
- [28] Zhihui Miao, Jixue Mo, Gang Li, Yinghao Ning and Bing Li, “Wheeled hopping robot with combustion-powered actuator,” *International Journal of Advanced Robotic Systems*, pp. 1–14, 2018, [10.1177/1729881417745608](https://doi.org/10.1177/1729881417745608).
- [29] M. Kovac, A. Guignard, J.-D. Nicoud, J.-C. Zufferey and D. Floreano, “A 1.5g SMA-actuated microglider looking for the light,” in *IEEE International Conference on Robotics and Automation*, pp. 367–372, 2007, doi: [10.1109/ROBOT.2007.363814](https://doi.org/10.1109/ROBOT.2007.363814)
- [30] Sathvik Divi, Ryan St. Pierre, Hui Min Foong and Sarah Bergbreiter, “Controlling jumps through latches in small jumping robots,” *Bioinspir. Biomim.*, Vol. 18, 2023, [10.1088/1748-3190/acf824](https://doi.org/10.1088/1748-3190/acf824).
- [31] M. M. Kosiuk and S. A. Kostyuk, “Increasing the efficiency use impact energy at static-pulsed surface-plastic strengthening,” *Herald of Khmelnytskyi National University*, Issue 4, pp. 48–56, 2018,
- [32] C. Waguespack et al., *Mastering Autodesk Inventor 2009 and Autodesk Inventor LT 2009*, Wiley Publishing, Inc., 2008.

Проектування штовхаючого механізму стрибаючого робота

Р. В. Зінько¹ • М. В. Лобур¹ • А. Я. Здобицький¹ • Т. О. Стефанович¹

¹ Національний університет "Львівська політехніка", Львів, Україна

Анотація. У роботі наведено особливості проектування та можливі сфери реалізації кулачкового механізму стрибаючого робота. Обґрунтовано конструктивні та технологічні параметри робота відповідно до його маси, жорсткості пружини, а також профільної поверхні кулачка ударної системи в середовищі Autodesk Inventor.

Висвітлено напрямки розвитку конструкції стрибаючих роботів, а також обґрунтовано доцільність розробки кулачкового механізму роботів з врахуванням напрямку його стрибка відповідно до розподілу сил та діючих навантажень.

Наведено розрахунок енергосилових та конструктивних параметрів ударної системи та детально проаналізовано всі етапи процесу стрибка, що передбачають стискання пружини пристроєм важільного типу, усунення стискаючого пристрою, вивільнення пружини і завершальний балістичний етап (етап польоту).

Ключові слова: стрибаючий робот, кулачковий механізм, твердотільна модель, профіль кулачка.
